



HPL-36W

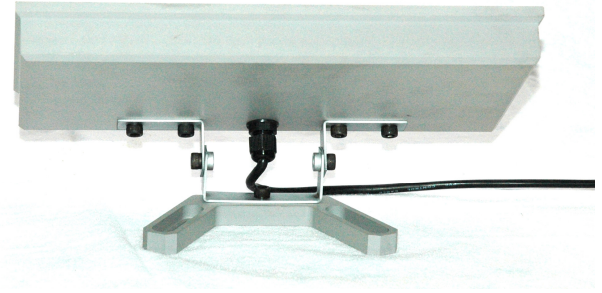

- Rate for indoor or outdoor use
- Aluminum Housing
- Controlled by DMX512
- Protection Rating : IP67
- High power LED 36 pcs , 15° Beam angle or 45 ° Beam angle
- 16.7 million (24bit) additive RGB colors; continuously variable intensity output range

Spec Function

Color	RED	YELLOW	GREEN	BLUE	WHITE	Warm White	RGB
Module No.	HPL-36W-R	HPL-36W-Y	HPL-36W-G	HPL-36W-B	HPL-36W-W	HPL-36W-WW	HPL-36W-RGB
LED Composition	AllnGap	AllnGap	InGan	InGan	--	--	
Operation VDC	24VDC						
Power Consumption	33.6	33.6	50.4	50.4	50.4	50.4	50.4
LED Quantity	36pcs						
Operating Temp.	-0°~ 50° C						

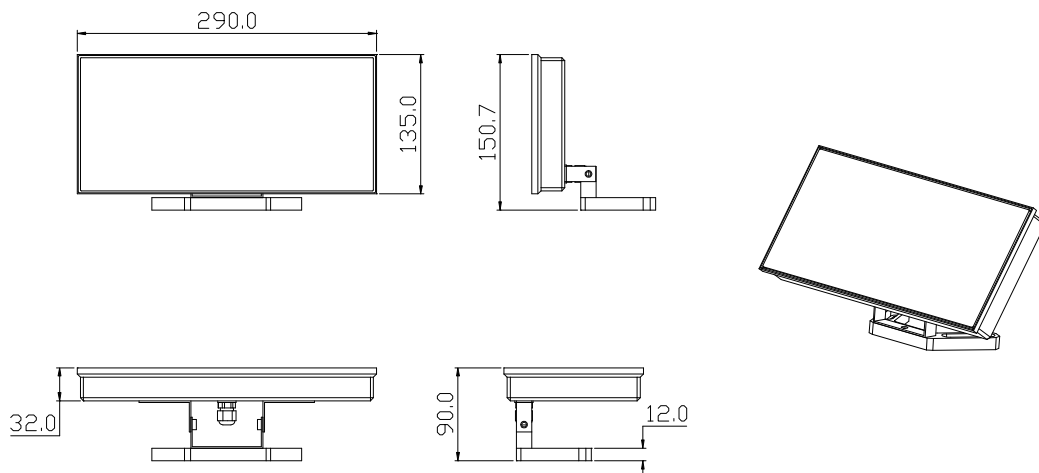

5F, No, 173-8, Yung-Fong Road, Tu cheng City, Taipei Hsien, Taiwan, ROC
 Tel:886-2-8262-8886 Fax:886-2-8262-8885 <http://www.hplighting.com.tw>